

Quickie 506


INSTANTANEOUS CONTINUOUS FLOW KIT

INSTANTANEOUS CONTINUOUS FLOW KIT Quickie 506

20mm loose nut connections to Hot Water System
20mm compression to hot, cold & mixed water
Gas Valve 20mm loose nut x 20mm flare

VALVE SPECIFICATIONS (20MM & 15MM TVA'S)

Cold water supply temperature:	5°C - 25°C
Hot Water supply temperature:	65°C - 99°C
Adjustable outlet temperature range:	40°C - 50°C
Factory set temperature:	50°C nominal (Must be commissioned onsite by installer)
Accuracy of outlet temperature:	±3°C - tested to AS4032.2
Minimum temperature differential (between hot supply and outlet temperature):	10°C
Supply pressure, static :	1600kPa maximum
Supply pressure, dynamic :	500kPa maximum
Supply pressure imbalance, dynamic :	2:1 maximum (at time of commissioning)
Maximum permitted pressure variation in either supply in order to control outlet temperature to ±3°C:	10 % maximum (from supply pressure at commissioning)
Flow rate minimum:	4 litres/min

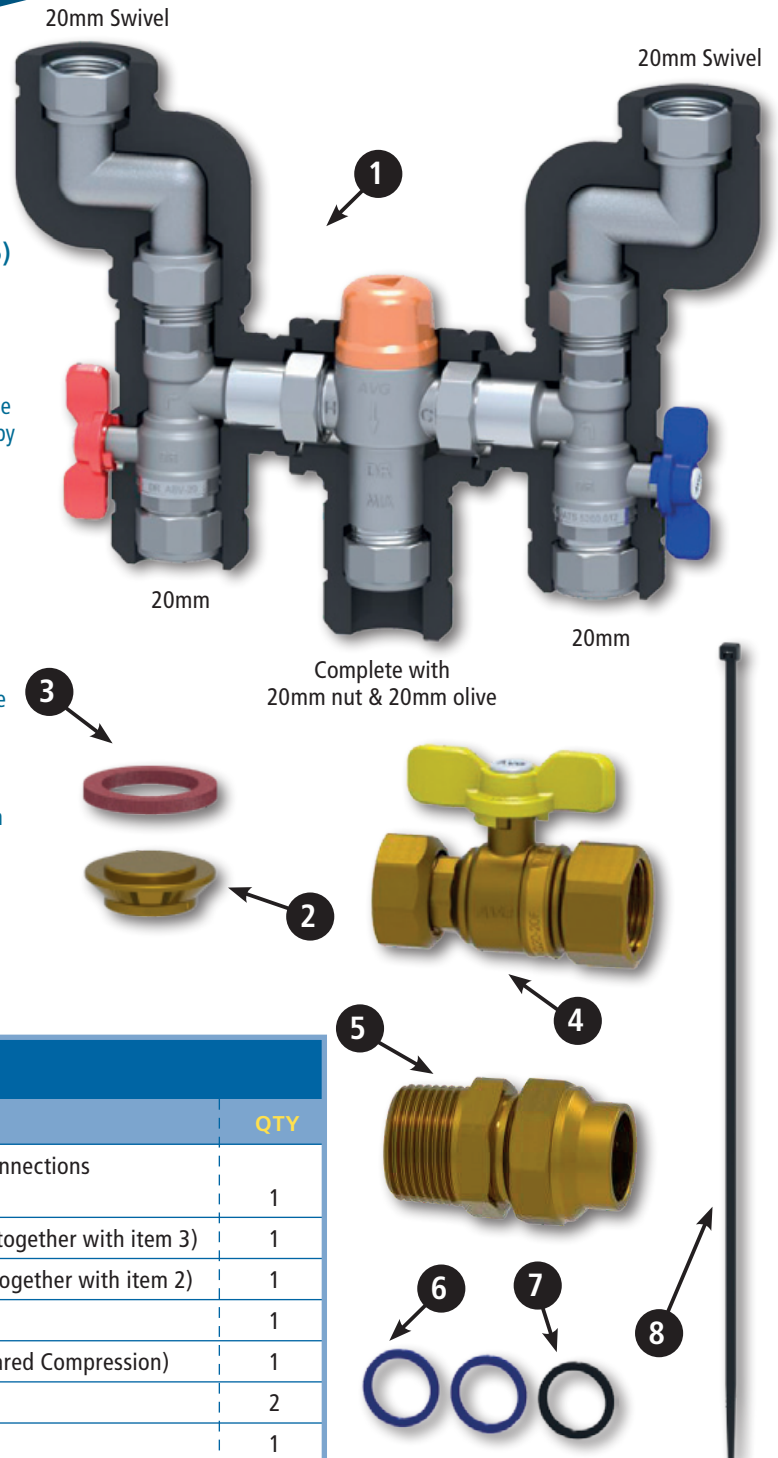

QIK506 KIT

ITEM NO.	DESCRIPTION	QTY
1	QIK506 Please note that one of the swivelling connections (on the hot side) is height adjustable	1
2	20mm Blanking disc (to be placed in plastic bag together with item 3)	1
3	20mm Fibre washer (to be placed in plastic bag together with item 2)	1
4	BVQ20-20F (20mm loose nut x 20mm female)	1
5	BFU20M120FL (Brass Fitting Union R ³ / ₄ " to ³ / ₄ " Flared Compression)	1
6	20mm Silicon Washer	2
7	20mm NBR Washer	1
8	Cable ties	14